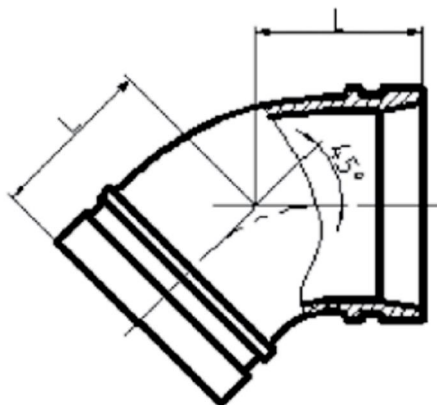


**SPECIFICHE DEI MATERIALI****CORPO:**

Ghisa sferoidale conforme ad ASTM A-536, Grado 65-45-12.

FINITURA

Vernice antiruggine ñ Colore: Rosso (standard)

Zincatura a caldo - (opzionale)

Diametro Nominale mm/inch	Diametro Esterno mm	Pressione di esercizio Bar/PSI	Dimensione L mm	Curva 45° Mod.	Peso Kg
25 1"	33,7	34,5 500	44,5	8051	0,20
32 1.1/4"	42,4	34,5 500	44,5	8051	0,30
40 1.1/2"	48,3	34,5 500	44,5	8051	0,35
50 2"	60,3	34,5 500	51,0	8051	0,50
65 2.1/2"	76,1	34,5 500	57,0	8051	0,80
80 3"	88,9	34,5 500	63,5	8051	1,15
100 4"	114,3	34,5 500	76,0	8051	1,90
125 5"	139,7	34,5 500	82,5	8051	2,90
150 6"	168,3	34,5 500	89,0	8051	3,60
200 8"	219,1	34,5 500	108,0	8051	6,80
250 10"	273,0	34,5 500	120,5	8051	14,70
300 12"	323,9	34,5 500	133,0	8051	21,60

**BOCCIOLONE ANTINCENDIO S.p.A.**

unipersonale

Via Indren, 2 Z.I. Roccapietra - 13019 Varallo (VC) - ITALY

TEL: 0163 - 568811 FAX: 0163 - 322022

e-mail: info@bocciolone.com - www.bocciolone.com

SCHEDA TECNICA - DATA SHEET STñ 936 ñ 01

Descrizione - Description

Art.

CURVA 45° ñ ELBOW 45°

936

Rev. 0

Data ñ Date: 10/2015

Pag. 1 di 1